



Rehabilitate Infrastructure at Four Campgrounds

PRWI – PMIS 317499





Rehabilitate Infrastructure at Four Campgrounds

- Brief Description


The scope of work consists of replacing the deteriorating wastewater systems in A-Loop Oak Ridge campground, Cabin Camp 3, Turkey Run campground, and the Park's concessionaire-operated recreational vehicle (RV) campground in Prince William Forest Park. The project will also replace the deteriorating water lines and pavement in the RV campground.

- Location

Prince William Forest Park, Virginia

- Estimated Price

Between \$5M & \$10M

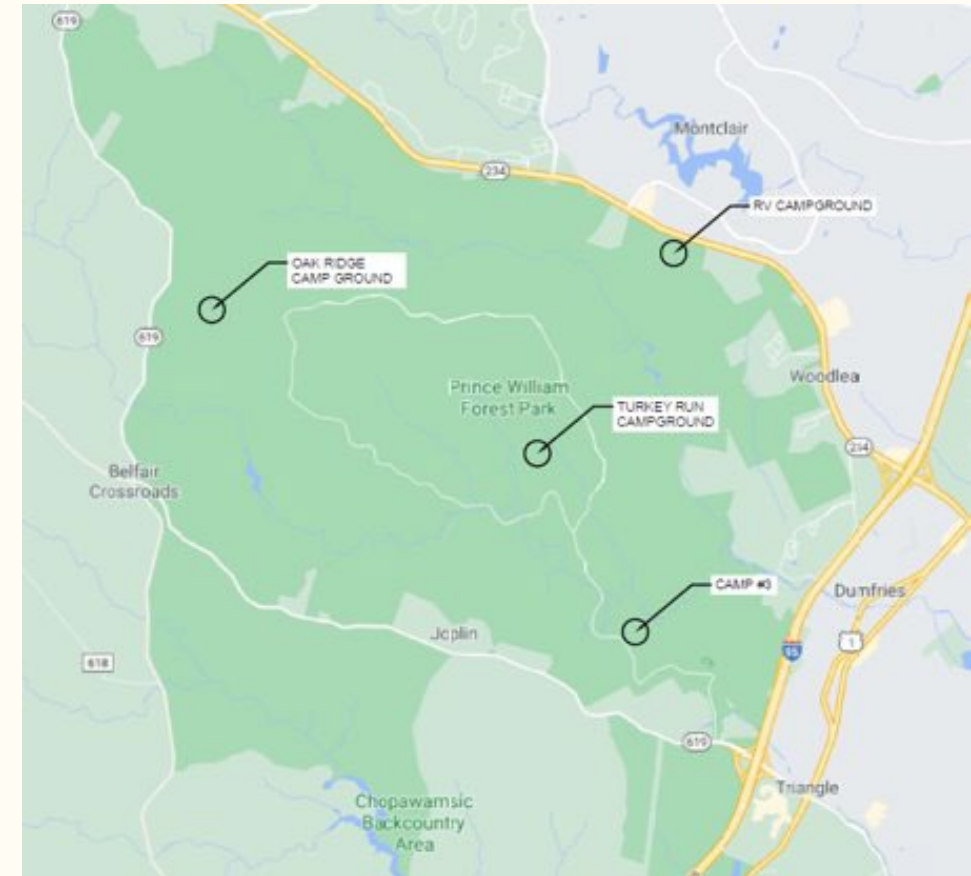



Rehabilitate Infrastructure at Four Campgrounds

- Design & Construction Method:
Design – Bid – Build
- Procurement Method:
Small Business Set-aside
- Schedule (Approximate):
Solicitation Date: June 2022
Award Date: September 2022
Period of Performance: 457 days



Camp Cabin 3
Campground

Existing concrete
septic field weir
diversion and
distribution box
located at Camp
Cabin 3. Outflow
pipes are clogged
full of roots



Turkey Run
Campground





Rehabilitate Infrastructure at Four Campgrounds

- Performance Constraints & Other Considerations
 - Natural and / or cultural resource considerations
 - Visitor access
 - Seasonal restrictions
 - Scheduling



Oak Ridge
Campground

Existing brick
manhole with
vitrified clay pipes
located at the
Cabin Camp 3



RV Campground

