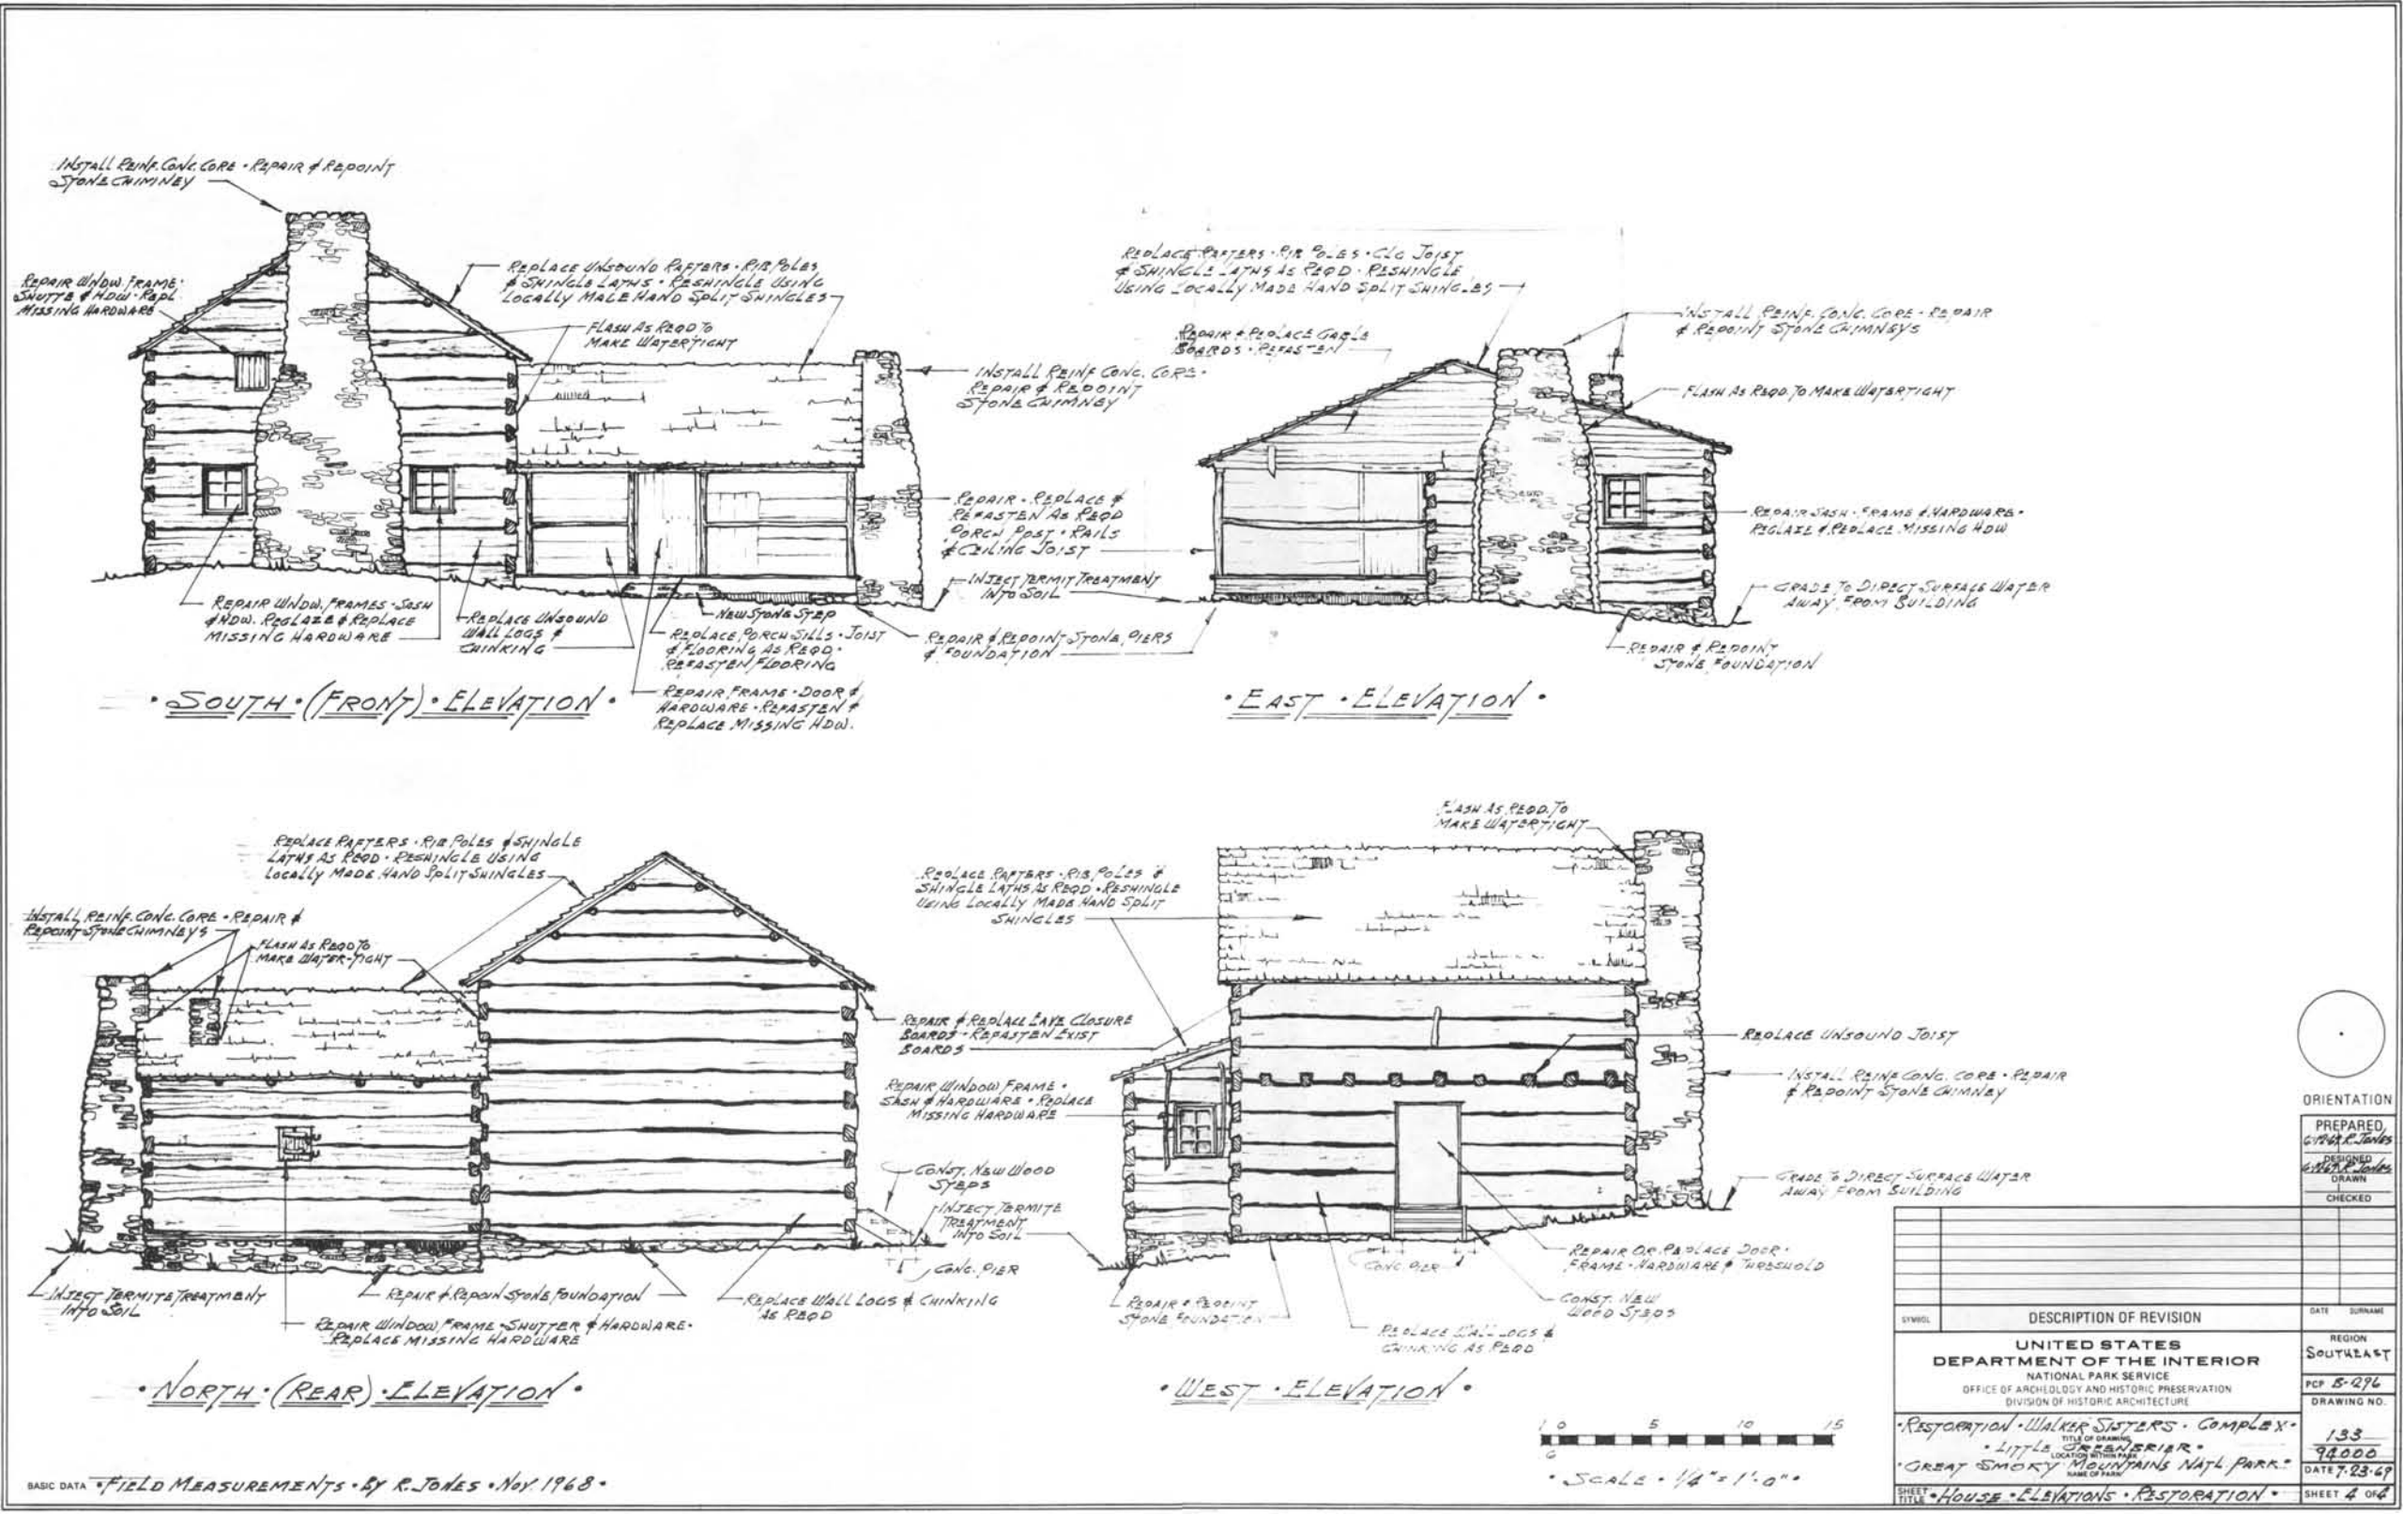
INSTALL REINF. CONC. CORE · REPAIR & REPOINT STONE CHIMNEY
REPAIR WNDW. FRAME · SHUTTE & HDW · REPL MISSING HARDWARE
REPLACE UNSOUND RAFTERS · RIB POLES & SHINGLE LATHS · RESHINGLE USING LOCALLY MADE HAND SPLIT SHINGLES
FLASH AS REQD TO MAKE WATERTIGHT
INSTALL REINF CONC. CORE · REPAIR & REPOINT STONE CHIMNEY
REPAIR · REPLACE & REFASTEN AS REQD PORCH POST · RAILS & CEILING JOIST
INJECT TERMIT TREATMENT INTO SOIL
REPAIR WNDW. FRAMES · SASH & HDW. REGLAZE & REPLACE MISSING HARDWARE
REPLACE UNSOUND WALL LOGS & CHINKING
NEW STONE STEP
REPLACE PORCH SILLS · JOIST & FLOORING AS REQD · REFASTEN FLOORING
REPAIR FRAME · DOOR & HARDWARE · REFASTEN & REPLACE MISSING HDW.
REPAIR & REPOINT STONE PIERS & FOUNDATION
· SOUTH · (FRONT) · ELEVATION ·
REPLACE RAFTERS · RIB POLES · CLG JOIST & SHINGLE LATHS AS REQD · RESHINGLE USING LOCALLY MADE HAND SPLIT SHINGLES
REPAIR & REPLACE GABLE BOARDS · REFASTEN
INSTALL REINF. CONC. CORE · REPAIR & REPOINT STONE CHIMNEYS
FLASH AS REQD TO MAKE WATERTIGHT
REPAIR SASH · FRAME & HARDWARE · REGLAZE & REPLACE MISSING HDW
GRADE TO DIRECT SURFACE WATER AWAY FROM BUILDING
REPAIR & REPOINT STONE FOUNDATION
· EAST · ELEVATION ·
REPLACE RAFTERS · RIB POLES & SHINGLE LATHS AS REQD · RESHINGLE USING LOCALLY MADE HAND SPLIT SHINGLES
INSTALL REINF. CONC. CORE · REPAIR & REPOINT STONE CHIMNEYS
FLASH AS REQD TO MAKE WATER-TIGHT
REPAIR & REPLACE EAVE CLOSURE BOARDS · REFASTEN EXIST BOARDS
REPAIR WINDOW FRAME · SASH & HARDWARE · REPLACE MISSING HARDWARE
CONST. NEW WOOD STEPS
INJECT TERMITE TREATMENT INTO SOIL
CONC. PIER
INJECT TERMITE TREATMENT INTO SOIL
REPAIR & REPOIN STONE FOUNDATION
REPLACE WALL LOGS & CHINKING AS REQD
REPAIR WINDOW FRAME · SHUTTER & HARDWARE · REPLACE MISSING HARDWARE
· NORTH · (REAR) · ELEVATION ·
FLASH AS REQD TO MAKE WATERTIGHT
REPLACE RAFTERS · RIB POLES & SHINGLE LATHS AS REQD · RESHINGLE USING LOCALLY MADE HAND SPLIT SHINGLES
REPLACE UNSOUND JOIST
INSTALL REINF CONC. CORE · REPAIR & REPOINT STONE CHIMNEY
GRADE TO DIRECT SURFACE WATER AWAY FROM BUILDING
REPAIR OR REPLACE DOOR · FRAME · HARDWARE & THRESHOLD
CONC. PIER
CONST. NEW WOOD STEPS
REPAIR & REPOINT STONE FOUNDATION
REPLACE WALL LOGS & CHINKING AS REQD
· WEST · ELEVATION ·
0 5 10 15
· SCALE · 1/4" = 1'-0" ·
BASIC DATA · FIELD MEASUREMENTS · BY R. JONES · NOV. 1968 ·
ORIENTATION
PREPARED 6-19-69 R. JONES
DESIGNED 6-19-69 R. JONES
DRAWN
CHECKED
SYMBOL
DESCRIPTION OF REVISION
DATE
SURNAME
UNITED STATES
DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE
OFFICE OF ARCHEOLOGY AND HISTORIC PRESERVATION
DIVISION OF HISTORIC ARCHITECTURE
REGION SOUTHEAST
PCP B-296
DRAWING NO. 133 94000
DATE 7-23-69
SHEET 4 OF 4
· RESTORATION · WALKER SISTERS · COMPLEX ·
TITLE OF DRAWING
· LITTLE GREENBRIER ·
LOCATION WITHIN PARK
· GREAT SMOKY MOUNTAINS NATL PARK ·
NAME OF PARK
SHEET TITLE · HOUSE · ELEVATIONS · RESTORATION ·