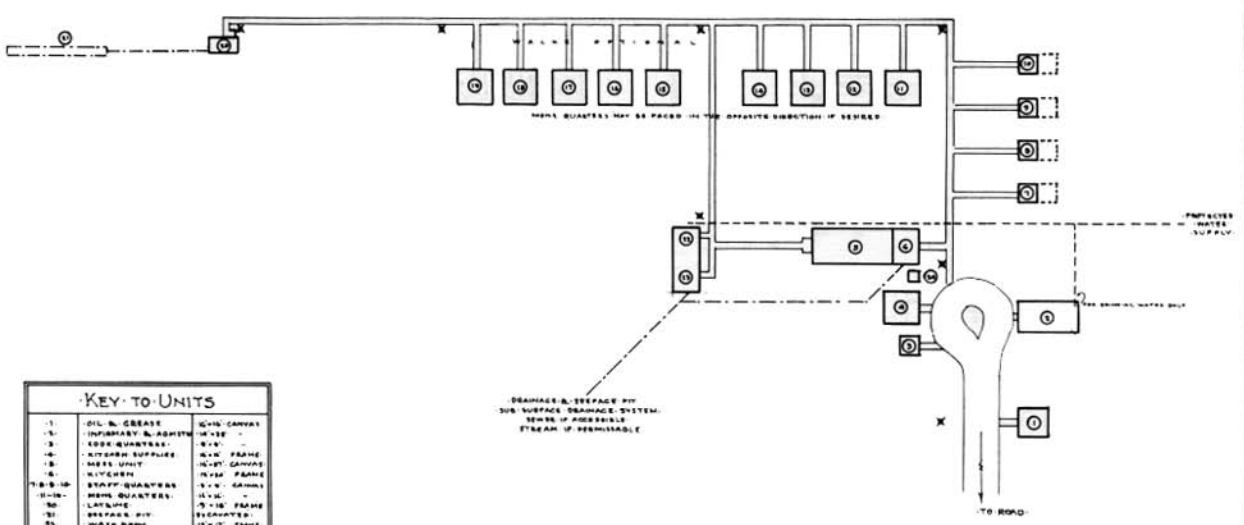

KEY TO UNITS

-1-	OIL & GREASE	10'×10' CANVAS
-2-	INFIRMARY & ADMIN	14'×32' "
-3-	FOOD QUARTERS	8'×8' "
-4-	KITCHEN SUPPLIES	8'×8' FRAME
-5-	MESS UNIT	16'×21' CANVAS
-6-	KITCHEN	16'×24' FRAME
-7-8-9-10-	STAFF QUARTERS	8'×8' CANVAS
-11-12-	MENS QUARTERS	12'×16' "
-13-	LATRINE	9'×16' FRAME
-14-	SEEPAGE PIT	EXCAVATED
-15-	WASH ROOM	12'×17' FRAME
-16-	SHOWERS	12'×12' "
-17-	GARBAGE	8'×8' "

NOTE #1:-

IF DESIRED, CANVAS FLYS MAY BE USED INSTEAD OF BUILT-UP ROOFS ON FRAME UNITS DURING MILD SEASONS.

NOTE #2:-

THE CONSTRUCTION DETAILS SEE SHEETS P.1, 2, 4, E.C.C.A. 7 & 8. THESE DETAILS SHALL BE MODIFIED IN SIZE TO SUIT REQUIREMENTS OF THIS CAMP AS LISTED ABOVE.

LATRINE TO HAVE 8 SEATS - 1 URINAL
WASH UNIT TO HAVE 12 BASINS
SHOWER ROOM TO HAVE 4 SHOWER HEADS.

SYMBOLS

WATER LINES
SEWER LINES
OUTSIDE (MILK) LIGHTS.

APPROVED —

APPROVED —

CAMP FOR 50 MEN - TYPICAL

EMERGENCY CONSERVATION WORK
ROBERT FECHNER, DIRECTOR

LABOR CAMPS
FOR REFORESTRATION PROJECTS

PREPARED BY
U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE
ROBERT Y. STUART, CHIEF FORESTER

DATE 4-11-33

SHEET NO. 1-B